



MARCO PIERRE WHITE

 **Russell Hobbs**



instructions

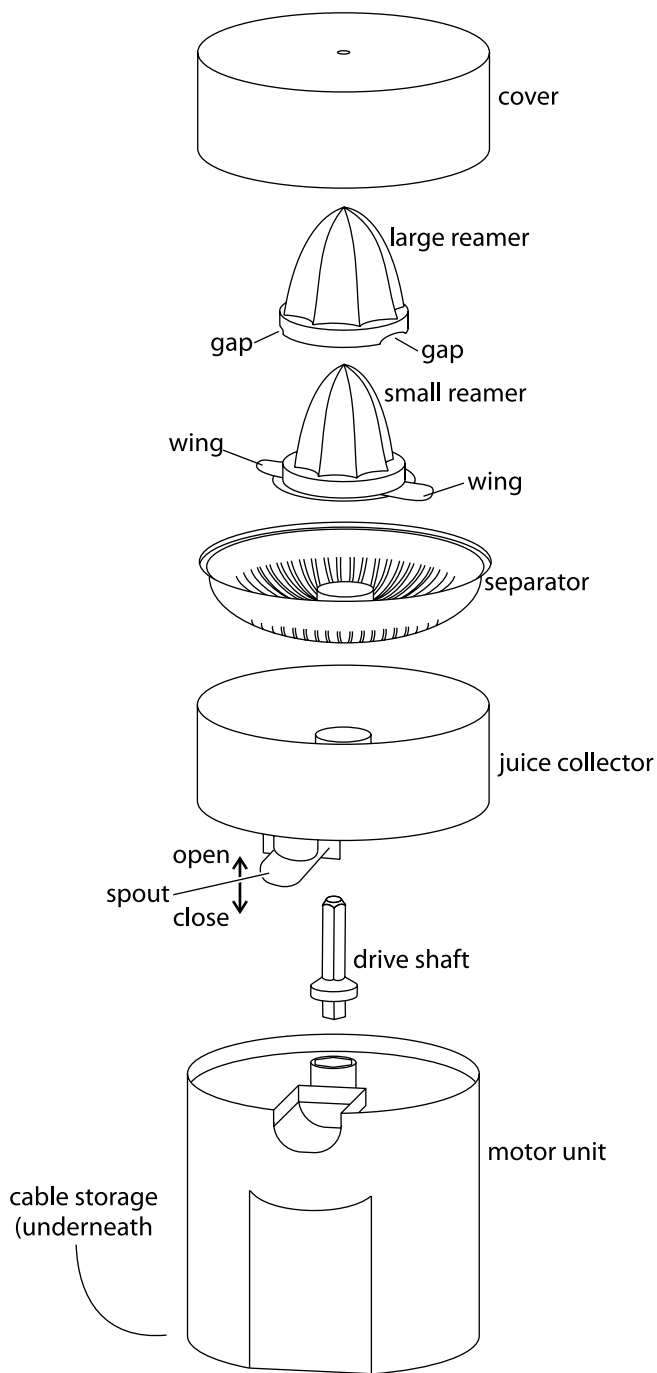

Read the instructions and keep them safe. If you pass the citrus press on, pass on the instructions too. Remove all packaging, but keep it till you know the citrus press works.

important safeguards

Follow basic safety precautions, including:

- 1 This citrus press must only be used by or under the supervision of a responsible adult. Use and store the citrus press out of reach of children.
- 2 Don't put the motor unit in liquid, don't use it in a bathroom, near water, or outdoors.
- 3 Route the cable so it doesn't overhang, and can't be tripped over or caught.
- 4 Unplug before dismantling or cleaning.
- 5 Sit the motor unit on a stable, level surface.
- 6 Keep the citrus press and the cable away from hotplates, hobs or burners.
- 7 Store the citrus press away from direct sunlight, and, if possible, from fluorescent light.
- 8 Don't run the motor for more than 2 minutes, or it may overheat. After 2 minutes, switch off for at least 2 minutes, to let the motor cool.
- 9 Don't use the citrus press for any purpose other than those described in these instructions.
- 10 Don't use the citrus press if it's damaged or malfunctions.
- 11 If the cable is damaged, return the citrus press, in order to avoid hazard.



household use only

dismantling

- 1 Unplug the citrus press.
- 2 Lift the reamers off the drive shaft.
- 3 Grip the large reamer in one hand, and the wings of the small reamer in the other, and separate the two reamers.
- 4 Lift the separator off the juice collector.
- 5 Lift the juice collector off the motor unit.
- 6 Pull the drive shaft up and off the motor unit.

care and maintenance

- 7 Unplug the citrus press.
- 8 Wipe outer surfaces with a damp cloth. If necessary, use a little washing-up liquid.
- 9 Wash the removable parts in warm soapy water, rinse well, and dry.
- 10 Don't wash any part of the citrus press in a dishwasher.
- 11 The extreme environment inside the dishwasher can affect the surface finishes.
- 12 Don't put the citrus press in water or any other liquid.
- 13 Don't use harsh or abrasive cleaning agents or solvents.

assembling

- 14 Unplug the citrus press.
- 15 Sit the motor unit on a stable, level surface.
- 16 Push the bottom of the drive shaft into the hexagonal hole top of the motor unit.
- 17 Align the spout with the space in the front of the motor unit, and lower the juice collector on top of the motor unit.
- 18 Lower the separator on top of the juice collector.

19 To use the large reamer, lower it on top of the small reamer, so the gaps in the bottom of the large reamer fit over the wings in the small reamer.

a) Use the large reamer for large fruit like grapefruit, ugli, and pomelo.

b) Use the small reamer for small fruit like lemons and limes.

20 Lower the reamer over the drive shaft in the centre of the citrus press.

preparation

21 Use good quality, fresh, ripe, citrus fruit.

22 Wipe the fruit.

23 Turn the fruit on its side and cut in half with a sharp knife, to cut through the centres of the segments.

pressing

24 Plug the citrus press into the power socket.

25 Put a glass or small jug below the spout.

26 Push the spout down, to open it.

27 Using one half-fruit at a time, place the cut (flesh) side on top of the reamer and press it down.

28 The reamer will turn, pressing the juice out of the half-fruit.

29 The motor is a simple one, so the reamer won't always turn the same way.

30 Move the fruit around, to ensure that the reamer reaches all of the flesh.

31 When you stop pressing, the motor will stop.

32 Do the same with the rest of your fruit.

33 Don't use the citrus press continuously for more than 2 minutes. After 2 minutes use, let it rest for 2 minutes before carrying on.

34 Keep an eye on the level in the glass/jug.

35 When it's full, stop juicing, push the spout up to close it and stop the juice flowing.

36 Remember to push the spout down to open it, when you replace the jug and start juicing again.


37 When you've finished, disassemble, clean, and store it away.

38 The cable may be stored in the area under the motor unit.

connection

The product doesn't need an earth. It has a 13A BS1362 fuse in a 13A BS1363 plug. To replace the plug, fit the blue wire to N, and the brown wire to L. Fit the cord grip. If in doubt, call an electrician.

Don't use a non-rewireable/moulded plug unless the fuse cover is in place. If you remove the plug, dispose of it.



service

If you ring Customer Service, please have the **Model No.** to hand, as we won't be able to help you without it. It's on the rating plate (usually underneath the product).

The product isn't user-serviceable. If it's not working, read the instructions, check the plug fuse and main fuse/circuit breaker. If it's still not working, consult your retailer. If that doesn't solve the problem:

Pack carefully, with a note of your name, address, day phone number, and what's wrong. If under guarantee, say where and when purchased, and include proof of purchase (till receipt). Send it to Customer Returns (address below right).

Customer Service

(correspondence only)
Salton Europe Ltd
Failsworth
Manchester
M35 0HS

Customer Returns

Salton Europe Ltd
Heath Mill Road
Wombourne
Wolverhampton
WV5 8AQ

Customer Service (service@saltoneurope.com)
telephone 0845 658 9700 (local rate number)

guarantee

Defects affecting product functionality appearing within one year of purchase will be corrected by replacement or repair provided the product is used and maintained in accordance with the instructions. Your statutory rights are not affected.

Documentation, packaging, and product specifications may change without notice.